

## Beta gauge particulate monitor

**A measuring device for the continuous monitoring of the smallest concentration of particles in the ambient air (fine dust).**

### Features

- C-14 method, no measurable decrease in activity
- Lowest radioactivity of all beta gauges, usable without licence, or disclosure
- Automatic zero correction
- Pre-calibrated, no site-specific calibration required
- Mass-flow controlled sample flow 1 m<sup>3</sup>/h
- Extraction of a constant sample flow, irrespective of the ambient temperature
- Repeated collection on the same spot, collected particles available for heavy metal analysis
- RS-232 interface and analog output, status signals

### Applications

- Immissions measuring systems for monitoring fine dust
- Mobile immissions-measuring
- Dust measurement in health and safety applications
- Interior dust measurements
- Measurement and collection of dust particles for heavy metal analysis
- Long-term background studies in ambient dust concentration
- Dust measurement and collection at problem sites and repositories
- Dust measurement for secondary emission of repositories (e.g. coal).
- Dust measurement in supply air and exhaust ducts.


### Approvals

- Suitability-tested by the TÜV Munich, test report 720349
- Itemized in the list of suitable measuring devices for continuous emission measuring.



### Measuring principle

The measuring principle of the F-701-20 ambient dust monitor is based on the absorption of the beta rays (electrons) emitted by a radioactive emitter through particles collected from an ambient air flow. In the F-701-20 the pulse rate of the unloaded filter tape is measured before each collecting cycle, then dust is collected on this precise filter spot over a pre-defined period, and finally the pulse rate of the loaded filter tape is measured. The difference between the two pulse rates is evaluated in the device and displayed as dust concentration in µg/m<sup>3</sup>.

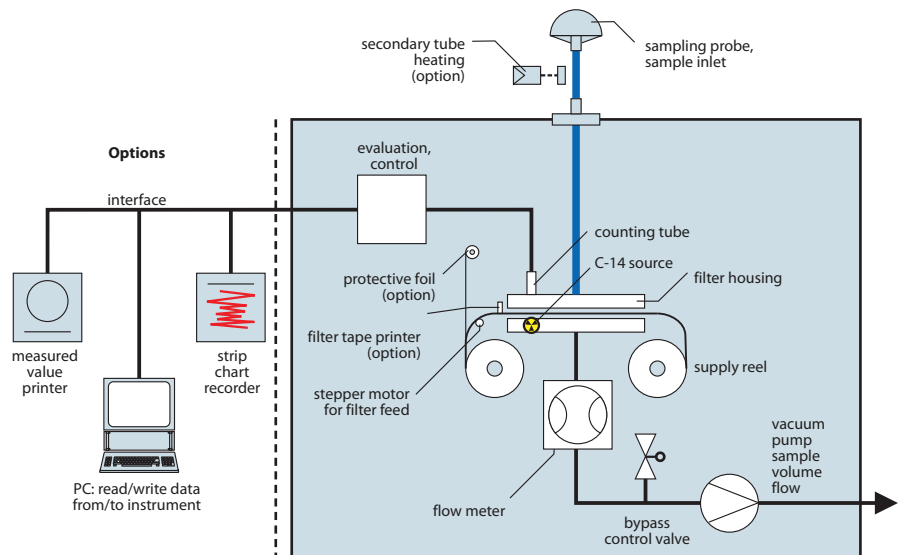

### Options

Further sample inlets:

- PM-2.5 (accordant EN 12341)
- PM-10 (according to EN 12341)
- Total dust (according to VDI 2463)

measurements	dust concentration	accuracy	<2% of measuring range
measuring ranges	0–0.1 ... 0–10 mg/m <sup>3</sup>	detection limit	<0.001 mg/m <sup>3</sup>
measuring principle	beta-ray absorption	reference point drift	<1% of measuring range/month
ambient temperature	0 up to +50°C	zero point drift	automatic zero point correction
protection	IP20	supply voltage	230 VAC / 50 Hz, 110 V / 60 Hz, 400 VA
measuring outputs	2 x 0 / 4–20 mA / 500 Ohm	dimensions (h x w x d)	320 x 450 x 500 mm, 19"-rack mount / desk unit
digital outputs	8 relay outputs, permissible load 24 V, 12 VA	weight	26 kg
digital inputs	3 potential free inputs	probe tube length	standard 2 m 0.5–5 m possible

